

SOUND PROJECTORS

# SPMB Bidirectional Aluminum Sound Projectors


SPMB bidirectional sound projector with integrated 100V line transformer.

## SPMB 10


Aluminium body, 10W power sound projector loudspeaker with ceiling mounting bracket. 130Hz – 15kHz frequency response. Designed for use in music and speech reproduction applications. SPMB 10 has two built-in 5"(127 mm) full range speakers.







FREQUENCY RESPONSE

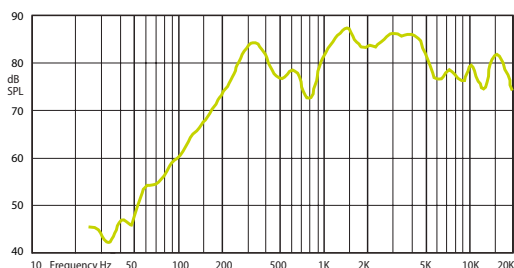

IMPEDANCE

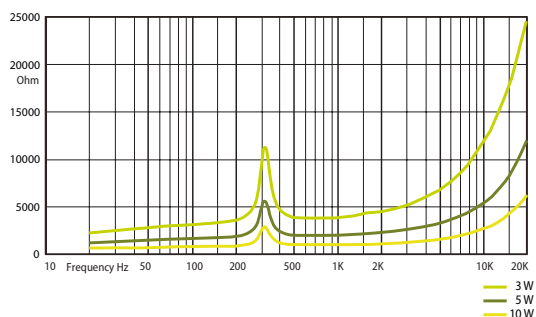

HORIZONTAL / VERTICAL POLAR DIAGRAMS



Technical Specifications	SPMB 10
Rated power	10 W
Transformer power taps at 100V	10 W - 5 W - 3 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 1223 Hz
Frequency response	180 Hz – 18 kHz
Dispersion at 1000 Hz	90° conical
Driver dimensions	5" (127mm)
Protections	IP 55
Dimensions	∅ 138 mm x 205 mm
Weight	2,7 Kg
Material	Aluminum
Colour	White (RAL 9018)